




Plastic loudspeaker for ceiling installation

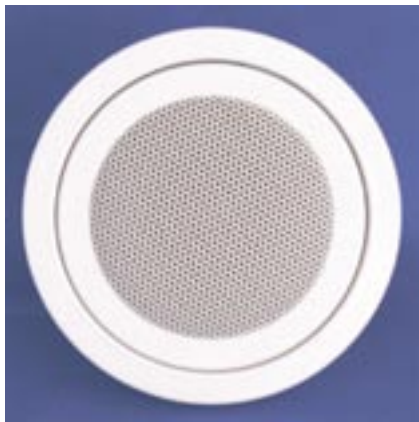


R-150

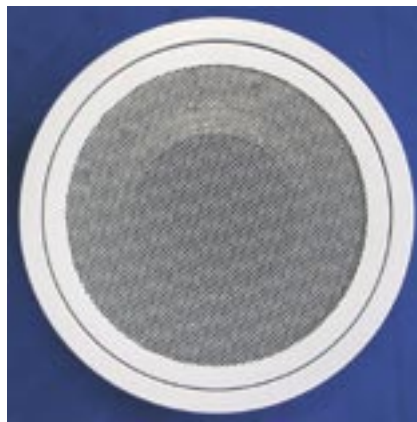

R-130

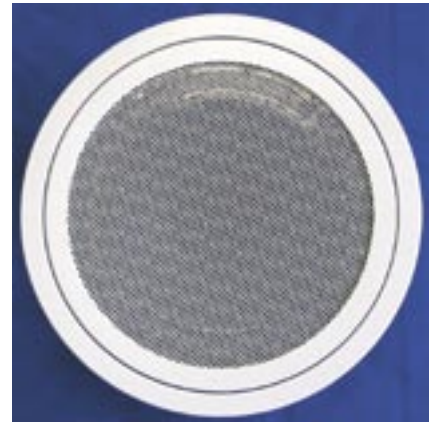

R-245

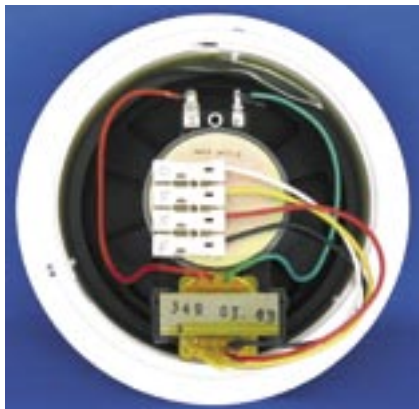

A shapely speaker combination set for installation in suspended ceilings. Both rings are made of white plastic material. These models are equipped with bayonet fitting and full range systems.

Typ	R-150	R-130	R-245
load rating	6W / 100V	6W / 100V	6W / 100V
Impedance	1667 Ω	1667 Ω	1667 Ω
Transformer matching	6 / 3 / 1,5	6 / 3 / 1,5	6 / 3 / 1,5
Sound pressure level (1W/1m)	93dB	93dB	98dB
max. Sound pressure level (1m)	101dB	101dB	106dB
Frequency range (-10dB)	70-19000 Hz	70-19000 Hz	50-18000 Hz
Transmission angle	180°	180°	150°
Dimensions (mm)	Ø 166x62	Ø 262x54	Ø 262x95
Ceiling/Wall cut-out (mm)	152-155	245	245
weight	0,8 kg	1,0 kg	1,4 kg
Color	white RAL9010	white RAL9010	white RAL9010