



Built-in loudspeaker

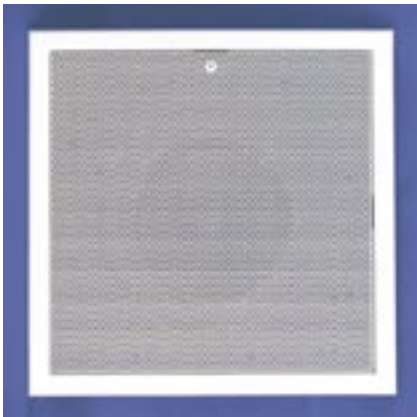

U-130

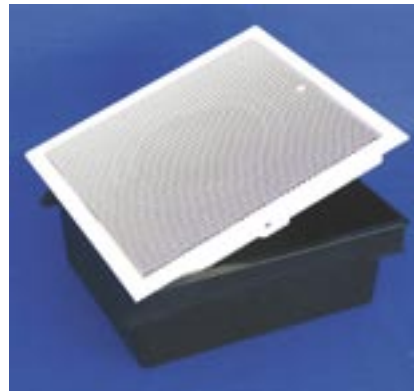

U-245

Square loudspeaker combination set for installation in walls and solid ceilings. The flush mounting enclosure made of plastic material must be installed on site flush with the wall or ceiling. Mounting frame is made of white plastic material. The baffle is secured to the frame by a screw. Suitable for speech and music reproduction.

Typ	U-130	U-130-10	U-245	U-245-10
load rating	6W / 100V	10W / 100V	6W / 100V	10W / 100V
Impedance	1667 Ω	1000 Ω	1667 Ω	1000 Ω
Transformer matching	6 / 3 / 1,5	10 / 5 / 2,5	6 / 3 / 1,5	10 / 5 / 2,5
Sound pressure level (1W/1m)	93dB	93dB	98dB	98dB
max. Sound pressure level (1m)	101dB	103dB	106dB	108dB
Frequency range (-10dB)	80-19000 Hz	80-18000 Hz	50-18000 Hz	50-18000 Hz
Transmission angle	180°	180°	160°	160°
Dimensions (mm)	248x248x100	248x248x100	248x248x100	248x248x100
wall out-cut	242x242x100	242x242x100	242x242x100	242x242x100
weight	1,4 kg	1,6 kg	1,7 kg	1,9 kg
Color	white RAL9010	white RAL9010	white RAL9010	white RAL9010