


Two-way systems



WDR-130-CX6 / CX10 / CX15

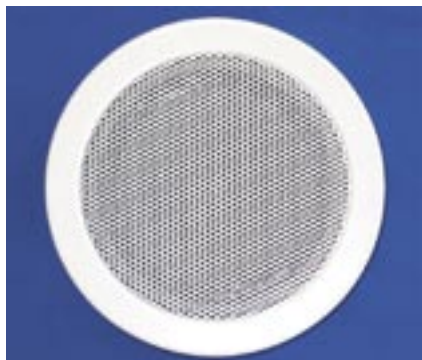

WDR-245-CX25

One-piece two-way ceiling loudspeaker with ball-proof grille, suitable for installation in ceilings of all kinds. The 130 mm two-way chassis features high sound quality and balanced frequency response. Ideally suited for applications in shopping centers, restaurants and offices. The sound transformer also ensures transmission of 50 Hz signals without distortions.

WDR-245-CX25 impresses by high sound pressure level although two-way technology is used. Structure and mounting compare to speaker WDR-130. Both speakers are most suitable for transmission of background music.

Connect – plug in – ready for use!

Typ	WDR-130-CX6	WDR-130-CX10	WDR-130-CX15	WDR-245-CX25
load rating	6W / 100V	10W / 100V	15W / 100V	25W / 100V
Impedance	1667 Ω	1000 Ω	667 Ω	400 Ω
Transformer matching	6 / 3 / 1,5	10 / 5 / 2,5	15 / 7,5 / 3,75	25 / 12,5 / 6
Sound pressure level (1W/1m)	91dB	91dB	91dB	95dB
max. Sound pressure level (1m)	98dB	101dB	103dB	109dB
Frequency range (-10dB)	50-22000 Hz	50-22000 Hz	50-22000 Hz	60-20000 Hz
Transmission angle	180°	180°	180°	160°
Dimensions (mm)	Ø 167x98	Ø 167x98	Ø 167x109	Ø 252x85
Ceiling out-cut (mm)	140-150	140-150	140-150	215-230
weight	1,3 kg	1,4 kg	1,6 kg	1,9 kg
Color	white RAL9010	white RAL9010	white RAL9010	white RAL9010