




Metal loudspeaker for ceiling installation

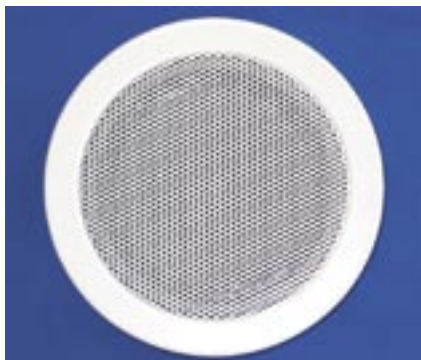

WDR-130

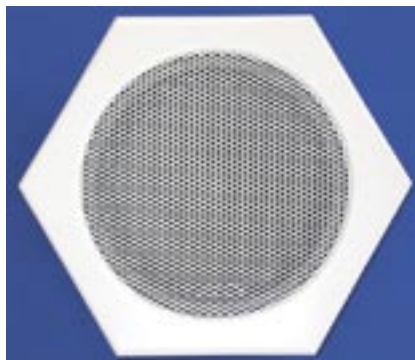

WDE-130

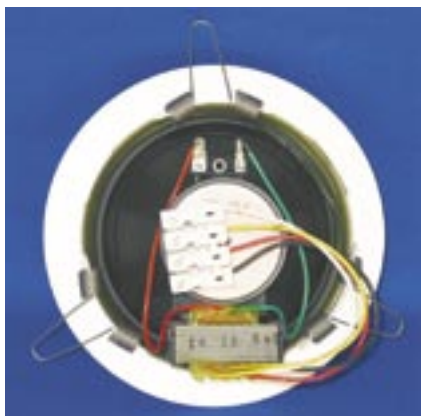

One-piece ceiling loudspeaker with ball-proof grille, suitable for installation in ceilings of all kinds. The 130 mm chassis impresses by high sound pressure level and an excellent frequency range. Quick mounting in a few seconds is ensured by our patented quick mounting system (with stainless steel spring clips). The housing is impregnated, thus protected against moisture.

Connect – plug in – ready for use!

Further applications possible due to an additional flush mounting enclosure for solid walls and concrete ceilings.

Typ	WDR-130	WDE-130	WDR-130-10	WDR-130-N
load rating	6W / 100V	6W / 100V	10W / 100V	15W
Impedance	1667 Ω	1667 Ω	1000 Ω	4 Ω
Transformer matching	6 / 3 / 1,5	6 / 3 / 1,5	10 / 5 / 2,5	-
Sound pressure level (1W/1m)	93dB	93dB	93dB	94dB
max. Sound pressure level (1m)	101dB	101dB	103dB	105dB
Frequency range (-10dB)	70-19000 Hz	70-19000 Hz	70-19000 Hz	60-20000 Hz
Transmission angle	180°	180°	180°	180°
Dimensions (mm)	Ø 167x62	Ø 168x62	Ø 167x62	Ø 167x48
Ceiling/Wall cut-out (mm)	140-150	140-150	140-150	140-150
weight	0,85 kg	0,85 kg	0,95 kg	0,6 kg
Color	white RAL9010	white RAL9010	white RAL9010	white RAL9010
Accessories	UPD	UPB		
	Flush box	Flush box for solid walls and concrete ceilings.		