


## Ceiling loudspeaker with fire dome



WDR-130-F

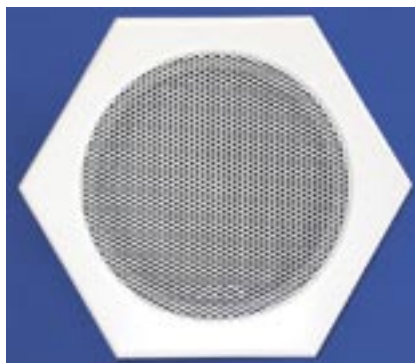

WDE-130-F



One-piece ceiling loudspeaker with ball- proof grille and fire dome, suitable for installation in ceilings of all kinds. The 130 mm housing impresses by high sound pressure level and an excellent frequency range. The loudspeaker will be completely installed including fire dome. The all-metal housing is impregnated, thus protected against moisture and heat-resistant up to more than 1000° Celsius. Our model BS5839 is designed in accordance with the BS5839 Norm.

*Connect – plug in – ready for use!*

Further applications possible due to an additional flush mounting enclosure for solid walls and concrete ceilings.

Typ	WDR-130-F	WDE-130-F	WDR-130-F-10	WDR-130-BS5839
load rating	6W / 100V	6W / 100V	10W / 100V	6W / 100V
Impedance	1667 Ω	1667 Ω	1000 Ω	1667 Ω
Transformer matching	6 / 3 / 1,5	6 / 3 / 1,5	10 / 5 / 2,5	6 / 3 / 1,5
Sound pressure level (1W/1m)	93dB	93dB	93dB	93dB
max. Sound pressure level (1m)	101dB	101dB	103dB	101dB
Frequency range (-10dB)	70-19000 Hz	70-19000 Hz	70-19000 Hz	70-19000 Hz
Transmission angle	180°	180°	180°	180°
Dimensions (mm)	Ø 167x95	Ø 168x95	Ø 167x95	Ø 167x95
Ceiling/Wall cut-out (mm)	140-150	140-150	140-150	140-150
weight	1,1 kg	1,1 kg	1,2 kg	1,3 kg
Color	white RAL9010	white RAL9010	white RAL9010	white RAL9010
Accessories	UPD	UPB		
	Flush box	Flush box for solid walls and concrete ceilings.		