


Metal loudspeaker for ceiling installation



WDR-245

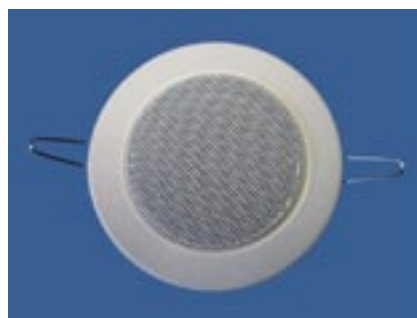

WDR-100



Our WDR-245 is equipped with a 200 mm high-performance full range system. This way a sound pressure level of 98 dB 1 W/1 m is achieved. Both types WDR-100 and WDR-245 are ball-proof and suitable for installation in ceilings of all kinds. Quick mounting in a few seconds is ensured by our patented quick mounting system (with stainless steel spring clips).

Connect – plug in – ready for use!

Typ	WDR-245	WDR-245-10	WDR-245-N	WDR-100	WDR-100-N
load rating	6W / 100V	10W / 100V	15W	6W / 100V	6W
Impedance	1667 Ω	1000 Ω	4 Ω	1667 Ω	4 Ω
Transformer matching	6 / 3 / 1,5	10 / 5 / 2,5	-	6 / 3 / 1,5	-
Sound pressure level (1W/1m)	98dB	98dB	98dB	90dB	90dB
max. Sound pressure level (1m)	106dB	108dB	109dB	98dB	98dB
Frequency range (-10dB)	50-18000 Hz	50-18000 Hz	50-18000 Hz	80-18500 Hz	80-18500Hz
Transmission angle	150°	150°	150°	180°	180°
Dimensions (mm)	Ø 252x82	Ø 252x82	Ø 252x82	Ø 101x70	Ø 101x65
Ceiling/Wall cut-out (mm)	215-230	215-230	215-230	74-85	74-85
weight	1,4 kg	1,5 kg	1,1 kg	0,5 kg	0,3 kg
Color	white RAL9010	white RAL9010	white RAL9010	white RAL9010	white RAL9010